




PLAMET 720 - Product family fact sheet

1. Product structure

Product structure graphic diagram

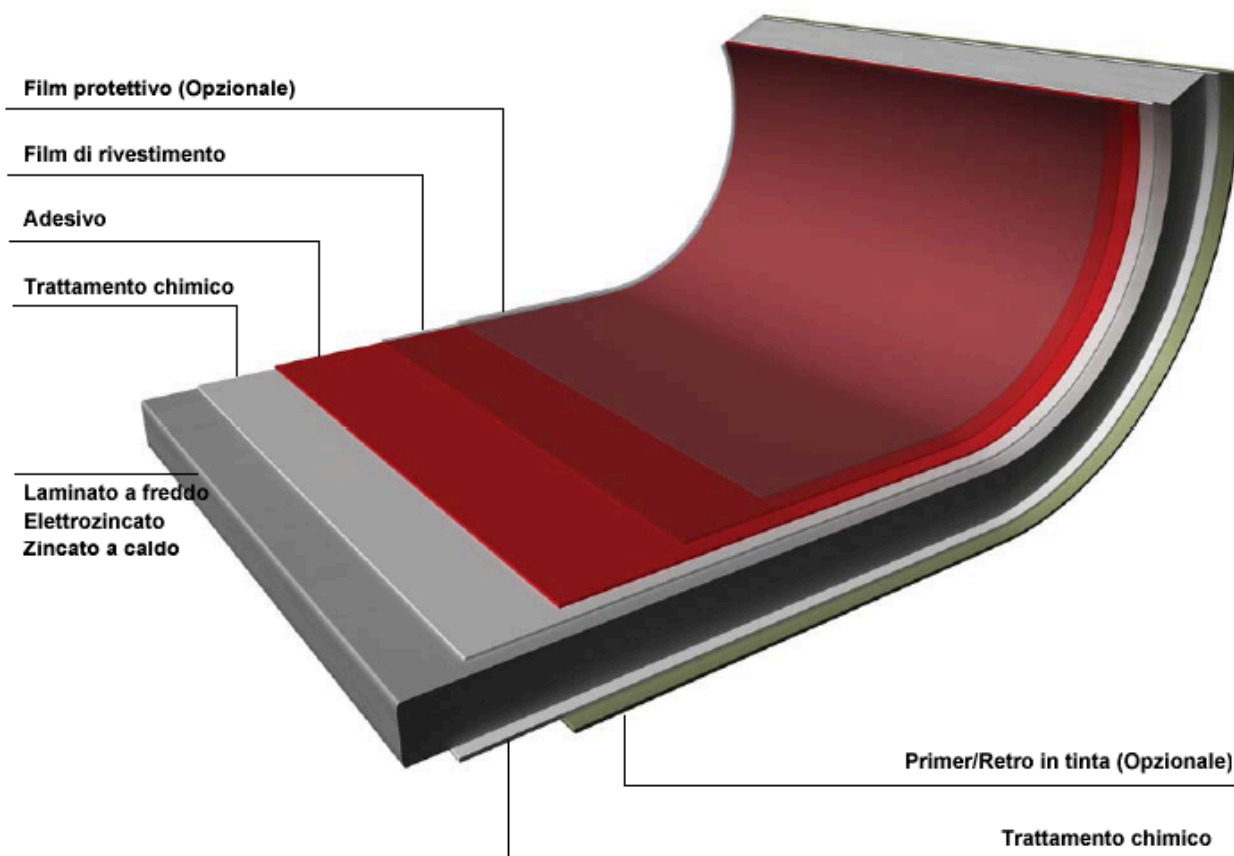



PLALAM METAL S.r.l. Lamiere prelaccate e plastificate
Sede Legale e commerciale: via Dante 6 – 20881 Bernareggio (MB)
P.iva 08691360963
info@plalam.it – www.plalam.it

Product description

PLAMET 720 product is achieved through a specific cycle coupling on a steel stand thin-film coating (Standard support electrogalvanized– DC01+Zn quality – Referenced norm UNI EN 10152). The product is characterized by high resistance to working cycles and by an excellent level of cleanability, to be used exclusively for internal use.

The metallic surface appearance and the smooth finish of the polyester film give the product the typical aesthetic characteristics of anodized aluminium.

Other types of available supports

Cold rolled steel – Referenced norm UNI EN 10130

Hot dip galvanized steel – Referenced norm UNI EN 10142

Applications

The PLAMET family products are used primarily in the following industrial sectors:

- Home appliances
- Interior furnishings (Doors)



2. Product technical characteristics:

The values of the technical characteristics below are the results of tests performed on the product with a standard support and coating.

Upper surface stratigraphy and properties

Chemical cleaning treatment and passivation

Primer - 5/8 μm depth (Optional)

Possible removable protective transparent film - 30-60 μm depth

Thermosetting adhesive depth 4-8 μm

Film coat depth 12 – 30 μm

Technical features	Referenced Norm	Min.	Max	Notes
Drawing adhesion	UNI EN 13523-6	80 %	100 %	
Impact adhesion	UNI EN 13523-5	No detachment is noted		
Shine	UNI EN 13523-2	5	>100	(Gloss) – light incidence angle 60°
Resistance to humidity (95% humidity/38 °C)	UNI EN 13523-23	No variation (500 h)		
Resistance to stains	UNI EN 13523-18	Excellent		
Resistance to MEK	UNI EN 13523-11	Excellent		
TB Adhesion	UNI EN 13523-7	0T	0T	
Cracking TB	UNI EN 13523-7	0T	0T	

Lower surface stratigraphy and properties

Chemical cleaning treatment and passivation

Foaming protective primer - 5-8 μm depth (Optional)

Technical features	Referenced Norm	Min.	Max	Notes
Drawing adhesion	UNI EN 13523-6	80 %	100 %	
Resistance to MEK	UNI EN 13523-11	10	50	Double strike
Foamability	Excellent			

Note: It is possible to have a pre-painted lower surface finish upon request.



3. Handling

Transport

Transport must take place in conditions that can guarantee protection of the material from humidity and condensation. The placement of the materials in vehicles must guarantee protection from blows, abrasions and tipping over.

Storage

In general, laminated products must be kept away from humidity, rain and any risks of condensation, as is true for the original metallic support material. For this reason, storage facilities must be covered and if possible, ventilated with constant temperatures.

The products must not come into sporadic contact with or be exposed to corrosive agents, such as solvents or other chemical products which could cause damage.

Processing

Material suitable for processing with pressing/bending, punching and profiling processes.

For correct processing, it is fundamental to perform periodic and thorough cleaning of the equipment and the surfaces that come into contact with the product.

It is recommended to keep the material at a temperature which is not below 18° C during the working cycle.

4. Maintenance

Cleaning

Cleaning can be executed using normal water, or if this is not sufficient, using a soft cloth dampened with a neutral or slightly alkaline detergent and water solution. This should be followed by rinsing and drying the surface carefully.

Touch-ups and refinishing

In the case of damage to small areas of the superficial layer, it is recommended to sand the affected area, clean it thoroughly and then paint it with a two-part enamel.

Note: In regards to the operations described in Section 4.1, avoid using solvents or abrasive substances.



5. Production Range

Cold laminated Electro zinc coated/ Hot pressed zinc coated		Depth(mm)											
		0.3	0.4	0.5	0.6	0.7	0.8	0.9	1.0	1.2	1.5	2.0	2.5
Width: (mm)	700/800	●	●	●	●	●	●	●	●	●	●	●	
	800/900	●	●	●	●	●	●	●	●	●	●	●	
	900/1000	●	●	●	●	●	●	●	●	●	●	●	
	1000/1100	●	●	●	●	●	●	●	●	●	●	●	
	1100/1200	●	●	●	●	●	●	●	●	●	●	●	
	1200/1300	●	●	●	●	●	●	●	●	●	●	●	
	1300/1400		●	●	●	●	●	●	●	●	●		
1400/1500		●	●	●	●	●	●	●	●	●			